
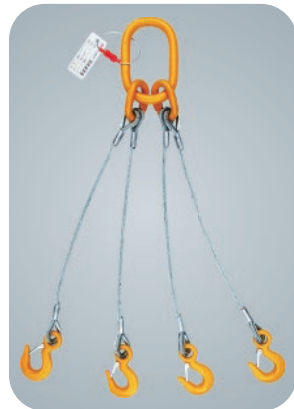


四腿成套压制索具

- 本表工作载荷所用的钢丝绳规格为：6X37+FC-1670；
- 本表附两种状态的工作载荷，若客户无特殊要求，则优先选用0° -45° 载荷；
- 钢丝绳结构不同，其工作载荷不同，可根据客户要求的钢丝绳结构来计算工作载荷。
- 符合标准GB/T 16271-1996规定

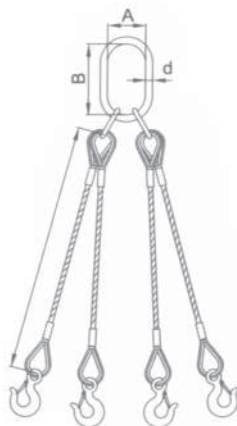

产品编号	钢丝绳直径 (mm)	额定载荷 (kN)		吊环参数 AXBXd (mm)	吊钩	
		0° -45°	45° -60°		型号	载荷 (t)
		UPF06	6.00			
UPF07	7.00	7.60	5.40	65X130X16	(美) S6	0.75
UPF08	8.00	9.90	7.10	65X130X16	(美) S6	0.75
UPF09	9.00	12.6	9.00	65X130X16	(美) S6	0.75
UPF10	10.0	15.0	11.0	65X130X16	(美) S6	0.75
UPF11	11.0	19.0	13.0	65X130X16	(美) S6	1.00
UPF12	12.0	22.0	16.0	80X150X20	(美) S6	1.50
UPF13	13.0	26.0	19.0	80X150X20	(美) S6	1.50
UPF14	14.0	30.0	22.0	80X150X20	(美) S6	1.50
UPF16	16.0	40.0	28.0	90X160X24	(美) S6	2.00
UPF18	18.0	50.0	36.0	90X160X24	(美) S6	3.00
UPF20	20.0	62.0	44.0	100X190X28	(美) S6	3.00
UPF22	22.0	75.0	54.0	100X190X28	(美) S6	5.00
UPF24	24.0	89.0	64.0	110X200X32	(美) S6	5.00
UPF26	26.0	105	75.0	110X200X32	(美) S6	5.00
UPF28	28.0	122	87.0	120X230X34	(美) S6	7.50
UPF30	30.0	138	99.0	135X250X38	(美) S6	7.50
UPF32	32.0	159	113	135X250X38	(美) S6	10.0
UPF34	34.0	178	127	140X270X42	(美) S6	10.0
UPF36	36.0	201	144	140X270X42	(美) S6	10.0
UPF38	38.0	224	159	160X310X46	(环眼)	15.0
UPF40	40.0	248	177	160X310X46	(环眼)	15.0
UPF42	42.0	273	195	180X330X52	(环眼)	15.0
UPF44	44.0	300	214	180X330X52	(环眼)	37.00
UPF46	46.0	327	234	180X330X56	(环眼)	37.00
UPF48	48.0	356	254	180X330X56	(环眼)	37.00
UPF50	50.0	388	277	180X330X56	(环眼)	37.00
UPF52	52.0	419	299	210X410X62	(环眼)	37.00
UPF54	54.0	451	322	210X410X62	(环眼)	37.00
UPF56	56.0	485	347	210X410X62	(环眼)	37.00
UPF58	58.0	521	372	210X410X68	(环眼)	37.00
UPF60	60.0	558	398	210X410X68	(环眼)	37.00

注：金属末端除配吊钩外，还可配以同等吨位的卸扣、吊钳等配件。