


吊环螺钉


- M6-M64采用合金钢模锻而成，M72-M100采用合金钢焊接而成。
- 最大试验载荷为额定载荷的2倍，最小破断载荷为额定载荷的4倍。
- 外形尺寸及检测要求按照ISO3266-1984和GB825-88的规定执行。

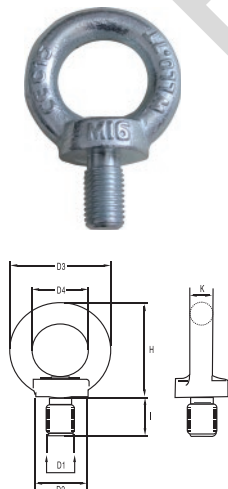

产品编号	主要技术参数 (mm)							工作载荷2(t)	工作载荷1(t)	自重(kg)
	D1	D2	D3	D4	H	K	I			
UQ09	M6	17.0	28.0	16.0	31.0	6.00	13.0	0.095	0.14	0.05
UQ09	M8	20.0	36.0	20.0	36.0	8.00	13.0	0.095	0.14	0.06
UQ09	M10	25.0	45.0	25.0	45.0	10.0	17.0	0.17	0.23	0.11
UQ09	M12	30.0	54.0	30.0	53.0	12.0	20.5	0.24	0.36	0.18
UQ09	M14	35.0	63.0	35.0	62.0	14.0	27.0	----	----	0.28
UQ09	M16	35.0	63.0	35.0	62.0	14.0	27.0	0.50	0.70	0.28
UQ09	M18	40.0	72.0	40.0	71.0	16.0	30.0	----	----	0.45
UQ09	M20	40.0	72.0	40.0	71.0	16.0	30.0	0.83	1.20	0.45
UQ09	M22	45.0	81.0	45.0	80.5	18.0	35.0	----	----	0.67
UQ09	M24	50.0	90.0	50.0	90.0	20.0	36.0	1.27	1.80	0.87
UQ09	M27	50.0	90.0	50.0	90.0	20.0	38.0	----	----	0.88
UQ09	M30	65.0	108	60.0	109	24.0	45.0	2.60	3.60	1.66
UQ09	M33	65.0	108	60.0	109	24.0	45.0	----	----	1.66
UQ09	M36	75.0	126	70.0	128	28.0	54.0	3.70	5.10	2.65
UQ09	M39	85.0	144	80.0	147	32.0	63.0	----	----	4.03
UQ09	M42	85.0	144	80.0	147	32.0	63.0	5.00	7.00	4.03
UQ09	M45	100	166	90.0	168	38.0	68.0	----	----	6.38
UQ09	M48	100	166	90.0	168	38.0	68.0	6.10	8.60	6.38
UQ09	M52	110	184	100	187	42.0	78.0	----	----	8.8
UQ09	M56	110	184	100	187	42.0	78.0	8.30	11.5	8.8
UQ09	M64	120	206	110	208	48.0	90.0	11.0	16.0	12.4
UQ09	M72	150	260	140	260	60.0	100	15.0	21.0	23.3
UQ09	M80	170	296	160	298	68.0	112	20.0	28.0	34.2
UQ09	M100	190	330	180	330	75.0	130	27.0	38.0	49.1

吊环螺母

- M6-M64采用合金钢模锻而成，M72-M100采用合金钢焊接而成。
- 最大试验载荷为额定载荷的2倍，最小破断载荷为额定载荷的4倍。
- 外形尺寸及检测要求按照ISO3266-1984和GB825-88的规定执行。

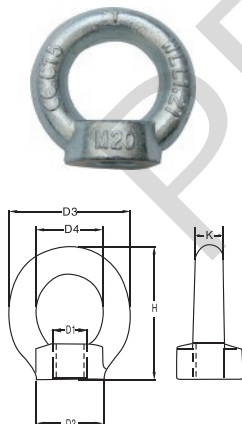

产品编号	主要技术参数 (mm)						工作载荷2(t)	工作载荷1(t)	自重(kg)
	D1	D2	D3	D4	H	K			
UQ10	M6	17.0	28.0	16.0	31.0	6.00	0.095	0.14	0.048
UQ10	M8	20.0	36.0	20.0	36.0	8.00	0.095	0.14	0.05
UQ10	M10	25.0	45.0	25.0	45.0	10.0	0.17	0.23	0.09
UQ10	M12	30.0	54.0	30.0	53.0	12.0	0.24	0.36	0.16
UQ10	M14	35.0	63.0	35.0	62.0	14.0	----	----	0.24
UQ10	M16	35.0	63.0	35.0	62.0	14.0	0.50	0.70	0.24
UQ10	M18	40.0	72.0	40.0	71.0	16.0	----	----	0.36
UQ10	M20	40.0	72.0	40.0	71.0	16.0	0.83	1.20	0.36
UQ10	M22	45.0	81.0	45.0	80.0	18.0	----	----	0.58
UQ10	M24	50.0	90.0	50.0	90.0	20.0	1.27	1.80	0.72
UQ10	M27	50.0	90.0	50.0	90.0	20.0	----	----	0.7
UQ10	M30	65.0	108	60.0	109	24.0	2.60	3.60	1.32
UQ10	M33	65.0	108	60.0	109	24.0	----	----	1.3
UQ10	M36	75.0	126	70.0	128	28.0	3.70	5.10	2.08
UQ10	M39	85.0	144	80.0	147	32.0	----	----	2.02
UQ10	M42	85.0	144	80.0	147	32.0	5.00	7.00	3.11
UQ10	M45	100	166	90.0	168	38.0	----	----	3.04
UQ10	M48	100	166	90.0	168	38.0	6.10	8.60	5.02
UQ10	M52	110	184	100	187	42.0	----	----	4.95
UQ10	M56	110	184	100	187	42.0	8.30	11.5	6.69
UQ10	M64	120	206	110	208	48.0	11.0	16.0	9.3
UQ10	M72x6	150	260	140	260	60.0	15.0	21.0	18.5
UQ10	M80x6	170	296	160	298	68.0	20.0	28.0	27.3
UQ10	M100x6	190	330	180	330	75.0	27.0	38.0	36.4